

With Elvita, you make room for all the things you appreciate. You get carefully selected products with smart solutions for a good price, designed to make life easy. Products for the entire household, making room for everyday life.



Pull-out



Adjustable fan speeds



Carbon filter (optional)



Easy to clean

CSF2600X Under-cabinet cooker hood

- 60 cm width
- Pull-out
- 3 fan speeds
- 2 LED lamps (3 W)
- Easy to clean

A discreet pull-out cooker hood with easy-to-use controls

This cooker hood is easy to use and gets the job done. Its pull-out design, 3 fan speeds and built-in LED lamps provides seamless integration into your cabinet and enjoyable cooking conditions.

Efficient performance at different fan speeds

The cooker hood lets you select a fan speed that suits your needs. This is a true friend in the kitchen, keeping the cooking environment fresh and grease-free.

Option to use with carbon filter

This cooker hood can be installed with an existing flue outlet, but also has the option to use a carbon filter. The carbon filter removes any impurities and odours from the air when it is recycled into the kitchen. Both installation options gives you a cooker hood with excellent performance.

Low-energy lamps

The built-in LED lamps gives effective lighting at a fraction of the energy spent compared to regular light bulbs, the life span is also remarkably longer.

Easy to clean filter

The removable aluminium grease filter are easy to clean. Handwash the filter or let the dishwasher do the dirty work. With little to no maintenance, this cooker hood is always exceeding expectations. Enjoy a fume-free and hassle-free cooking experience.



Product properties



Colour	Stainless steel
Installation	Pull-out
Type of control	Buttons
Filter type	Aluminium, carbon
LED lamps	2
Levels of speed	3
Backdraft damper	Yes

Technical specifications

Net weight	5.9 kg
Height	173 mm
Width	599 mm
Depth, adjustable	308-426 mm
Minimum height above electric range	650 mm
Minimum height above gas range	750 mm
Flue outlet, diameter	120 mm
Power supply	220-240 V, 50 Hz
Cord length, plug type	1.5 m, F-type
Rated power	91 W
Sound power level, min speed (LWA)	57 dB
Sound power level, max speed (LWA)	67 dB
Sound power level, boost (LWA)	-
Motor power	85 W
Maximum air flow	366 m³/h
Measured air flow rate at best efficiency point	198.6 m³/h
Energy efficiency class	C
Grease filtering efficiency class	C
Fluid dynamic efficiency	13.8
Nominal power of the lighting system	6 W
Model identifier	CSF2600X

For details about the energy efficiency of the product, go to <https://eprel.ec.europa.eu/>. Use the model identifier to find information.

Dimensions

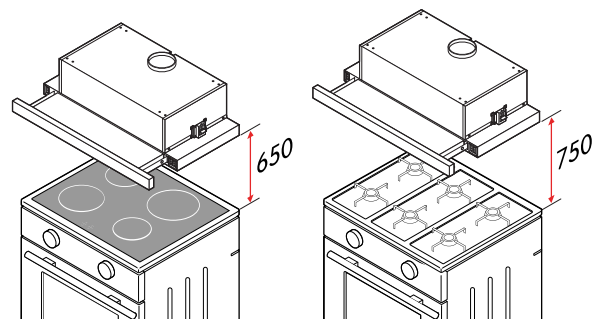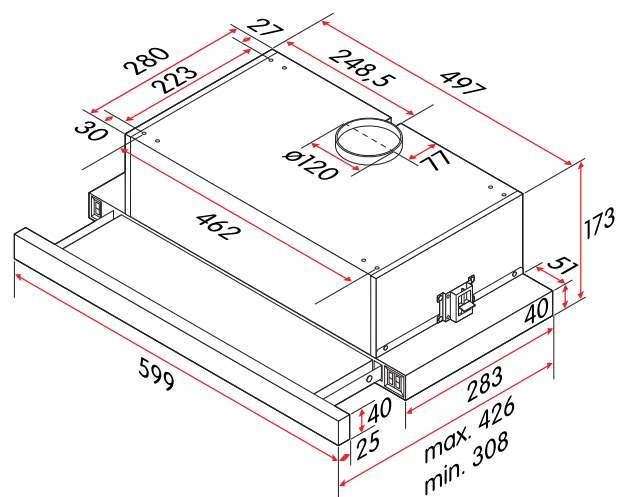

mm

The information may be subject to changes. Inadvertent errors in information may occur.

Energy label

